


PLACA ASUS PRIME A520M-A II CSM AMD RYZEN AM4

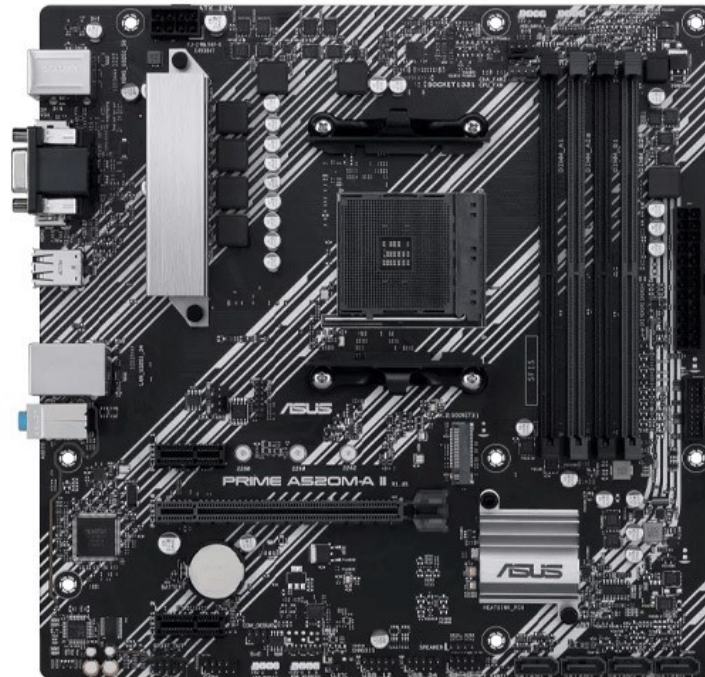

Modelo	PRIME A520M-A II/CSM
CPU	AMD Ryzen™ 5000 Series/ 5000 G-Series/ 4000 G-Series/ 3000 Series Desktop Processors
Chipset	A520
Memoria	Memory Channels: 4DDR4 (Dual channel) Max Memory Size: 128GB 4800(OC)/4600(OC)/4466(OC)/4400(OC)/4266(OC)/4133(OC)/4000(OC)/3866(OC)/3733(OC)/3600(OC)/3466(OC)/3333(OC)/3200/3000/2800/2666/2400/2133 MHz, Un-buffered
Gráficos	1 x D-Sub 1 x HDMI® port
Ranuras de expansión	1 x PCIe 3.0 x16 (x16 mode) AMD Ryzen™ 5000 Series/ 5000 G-Series/ 4000 G-Series/ 3000 Series Desktop Processors 1 x PCIe 3.0 x16 slot (supports x16 mode) AMD A520 Chipset 2 x PCIe 3.0 x1 slots
Almacenamiento	Supports 1 x M.2 slot and 4 x SATA 6Gb/s ports Supports 1 x M.2 slot and 4 x SATA 6Gb/s ports AMD Ryzen™ 5000 Series/ 5000 G-Series/ 4000 G-Series/ 3000 Series Desktop Processors M.2 slot (Key M), type 2242/2260/2280 (supports PCIe 3.0 x4 & SATA modes) AMD A520 Chipset

	<p>4 x SATA 6Gb/s ports Support Raid 0, 1, 10</p>
Ethernet	1 x Realtek 1Gb Ethernet
USB	<p>Rear USB:Total 6 ports 4 x USB 3.2 Gen 1 ports (4 x Type-A) 2 x USB 2.0 ports (2 x Type-A) Front USB:Front USB Port (Total 6) 1 x USB 3.2 Gen 1 header supports additional 2 USB 3.2 Gen 1 ports 2 x USB 2.0 headers support additional 4 USB 2.0 ports</p>
Audio	<p>ALC887/897 Realtek ALC887/897 7.1 Surround Sound High Definition Audio CODEC* - Supports : Jack detection, Multi-streaming, Front Panel Jack-retasking - Supports up to 24-Bit/192 kHz playback" Audio Features - Audio Shielding - Premium Japanese audio capacitors - Dedicated audio PCB layers</p>
Puertos E/S traseros	<p>4 x USB 3.2 Gen 1 ports (4 x Type-A) 2 x USB 2.0 ports (2 x Type-A) 1 x DisplayPort 1 x HDMITM port 1 x D-Sub 1 x Realtek 1Gb Ethernet port 3 x Audio jacks 1 x PS/2 Keyboard/Mouse combo port</p>
Puertos internos	<p>Fan and cooling related 1 x 4-pin CPU Fan header 2 x 4-pin Chassis Fan headers Power related 1 x 24-pin Main Power connector 1 x 8-pin +12V Power connector Storage related 1 x M.2 slot (Key M) 4 x SATA 6Gb/s ports USB 1 x USB 3.2 Gen 1 header supports additional 2 USB 3.2 Gen 1 ports 2 x USB 2.0 headers support additional 4 USB 2.0 ports Miscellaneous 2 x AURA Addressable Gen 2 header 2 x AURA RGB headers 1 x Clear CMOS header 1 x COM Port header 1 x Front Panel Audio header (AAFP) 1 x S/PDIF Out header 1 x Speaker header 1 x SPI TPM header (14-1pin) 1 x 10-1 pin System Panel header</p>
Funciones especiales	<p>ASUS 5X PROTECTION III - DIGI+ VRM - LANGuard - Overvoltage Protection</p>

<p>s de ASUS</p>	<ul style="list-style-type: none"> - SafeSlot Core - Stainless-Steel Back I/O ASUS Q-Design - ASUS Q-DIMM - ASUS Q-Slot ASUS Thermal Solution - VRM heatsink design AURA Sync - AURA RGB headers - Addressable Gen 2 RGB headers
<p>Software</p>	<ul style="list-style-type: none"> ASUS Exclusive Software Armoury Crate - Aura Creator - Aura Sync AI Suite 3 - Performance And Power Saving Utility TurboV EVO EPU Digi+ VRM Fan Xpert 2+ - EZ update ASUS CPU-Z AI Charger DAEMON Tools Norton Anti-virus software (Free Trial version) WinRAR UEFI BIOS ASUS EZ DIY - ASUS CrashFree BIOS 3 - ASUS EZ Flash 3 - ASUS UEFI BIOS EZ Mode
<p>BIOS</p>	<p>128 Mb Flash ROM, UEFI AMI BIOS</p>
<p>Manejabilidad</p>	<p>WOL by PME, PXE</p>
<p>Accesorios</p>	<ul style="list-style-type: none"> Cables 2 x SATA 6Gb/s cables Miscellaneous 1 x I/O Shield 1 x M.2 SSD screw package Installation Media 1 x Support DVD Documentation 1 x User manual
<p>Sistema operativo</p>	<p>Windows 10 64bit</p>
<p>Factor de forma</p>	<p>microATX 24.4cm x 24.4cm</p>

